

80/100/120 XEL



Capacity

80 XEL	570 kg including 3 people
100 XEL	450 kg including 3 people
120 XEL	320 kg including 3 people

Capacity on extension :

	140 kg including 1 person
--	---------------------------



Working height

80 XEL	8.00 m
100 XEL	10.20 m
120 XEL	12.20 m

Platform floor height

80 XEL	6.00 m
100 XEL	8.20 m
120 XEL	10.20 m



Overall length2.80 m

Overall width1.20 m

Overall height :

80/100/120 XEL2.25/2.41/2.55 m

Height with rails folded

80/100/120 XEL1.51/1.67/1.81 m

Platform size2.70 x 1.20 m

Platform extension size1.20 m

Ground clearance12 cm

Turning radius

Inside/Outside0.05 m/2.75 m



Travel speed0 to 3.4 Km/h

Outside use ..(120 kg) including 1 pers. - wind 45 km/h

Lift speed (80 XEL/100 XEL/120 XEL)40 to 54 s



Batteries24 V/220 Ah

Integrated charger24 V/30 Ah



Gradeability25%

Maximum slope2°



Non-marking tyres16.5"x11.25"

2 wheel drive (front)/2 wheel steer (front)



Weight

80/100/120 XEL2200/2420/2760 kg

Standard equipment



- Single beam lifting system Powerlift²™ with self lubricating pins for reduced maintenance
- Proportional controls
- Electronic controller for increased battery duty cycle
- Automatic Pothole Protection™
- Removable control box
- Battery charge indicator
- Swing gate for easy access to platform
- Foldable guardrail for increased accessibility
- Hour meter
- 220 V predisposal
- Flashing beacon
- Lifting brackets
- Forklift pockets

Optional features

- All motion alarm
- Working light
- 220 V electric plug in platform
- Airline to the platform



80 XEL : 2.25 m
100 XEL : 2.41 m
120 XEL : 2.55 m

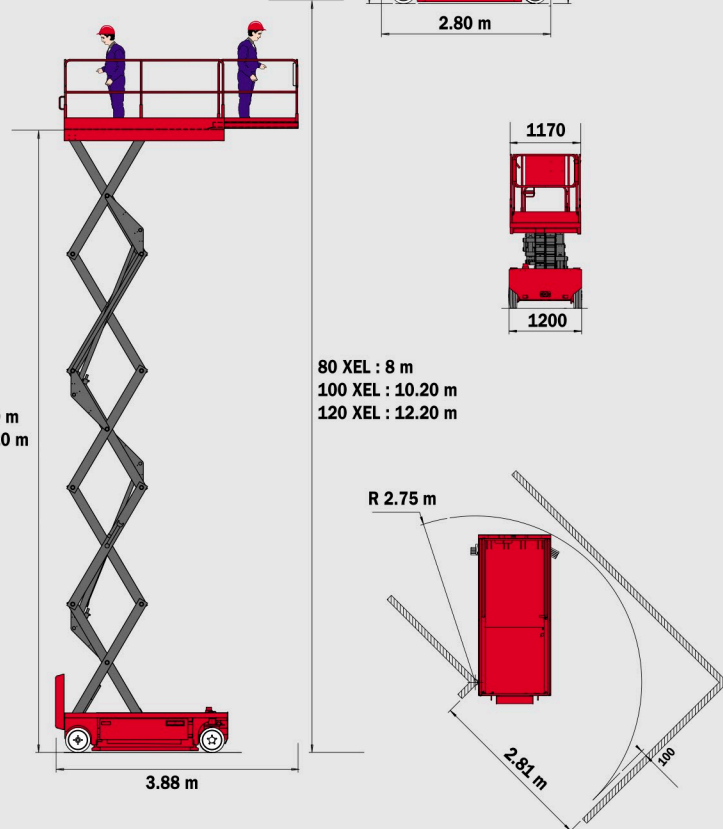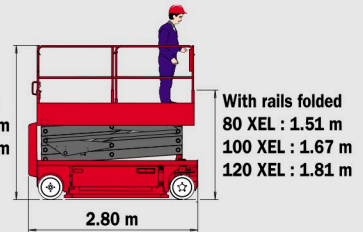

This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice. The MANITOU models presented in this brochure can be supplied complete with optional equipment attachments

